



## Alpha Flux 350 S - KZ -2, 65° bent




### Advantageous

- Flux-Cored Self Shielding Welding Torch
- Ceramic insulation - extreme high temperature durability
- Robust heat protection shield for optimal heat deflection
- Quick - change torch neck, fixable at all angles
- Silver-plated contact tips - low spatter adhesion
- Highly flexible coaxial cable BIKOX® R

### Specifications

Rating	330 A with self shielding Flux-Cored Wire
	60 % Duty Cycle
Wire sizes	1.2 - 2.4 mm

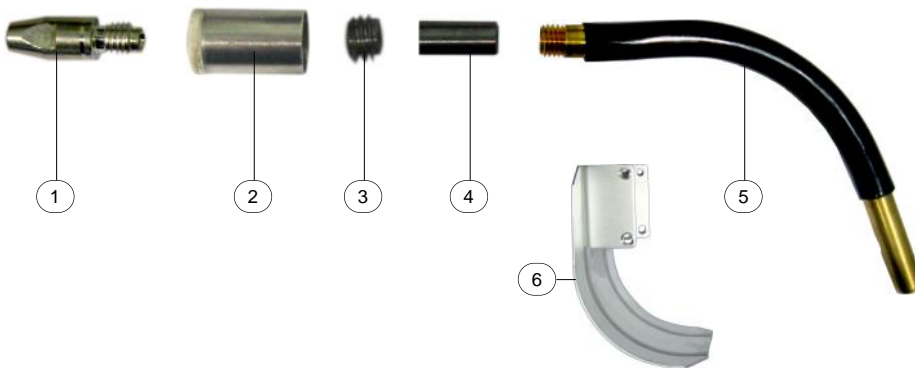

Pos	Item Code	Item Name	MoQ
1	204.24.001	Contact Tip M8, Silver Plated - Ø 1.2 mm - Ergoplus 24 - 36 - 500	10 Pcs
	204.24.002	Contact Tip M8, Silver Plated - Ø 1.6 mm - Ergoplus 24 - 36 - 500	10 Pcs
	204.24.003	Contact Tip M8, Silver Plated - Ø 2.4 mm - Ergoplus 24 - 36 - 500	10 Pcs
2	-	Insulator 1 ALPHA FLUX	1 Pc
3	-	102 - Threaded Pin M8 / 4.0 mm	1 Pc
4	-	103 - Sleeve Ø 3.5 mm, L = 12 mm, for wire up to Ø 2.0 mm	1 Pc
5	-	Swan neck Alpha Flux 350 M8 , 65° , X = 108 , Y = 115 , wire up to Ø 2.0 mm	1 Pc
6	-	Hand Shield for Alpha Flux	1 Pc

Item Code	Item Name	MoQ
204.08.001	Alpha Flux 350 S at 3 m - KZ-2, 65° bent	1 Set