


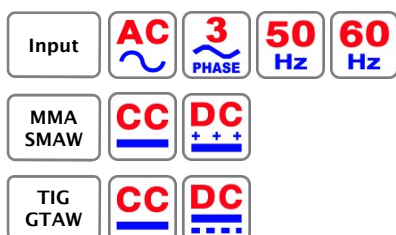

SMAW / MMA DC IGBT Inverter S Series 3 P


S 280 i
S 350 i
S 500 i

Main Applications

- Shipyards
- Metal tanks
- Steel fabricator
- Construction
- Sheet metal
- Medium to heavy industries
- Chemical and process industry
- Mechanical and electrical

Advantageous

- MMA / SMAW DC Inverter welding machine, feature exceptional ignition and welding properties
- Compact and robust design, user friendly panel design
- IGBT Inverter Technology for more durability
- Can weld cellulose electrode
- Adjustable hot start for easily starting welding current
- Adjustable arc force for easily control the arc
- Anti stick function to cut down the welding current to minimum when the electrode is stuck to the work-piece for safety
- Digital display for accurate welding amperage adjustment
- Selector switch for Tig welding with Lift Arc ignition
- Remote control device for S 350 i and S 500 i

MMA	S 280 i	S 350 i	S 500 i
Electrode range	1.6 - 6.0 mm	1.6 - 8.0 mm	1.6 - 10.0 mm
Material thickness	1 - 12 mm	1 - 16 mm	1 - 20 mm

TIG	S 280 i	S 350 i	S 500 i
Tungsten range	1.6 - 4.0 mm	1.6 - 4.0 mm	1.6 - 4.0 mm
Material thickness	1 - 6 mm	1 - 8 mm	1 - 10 mm

Specifications			
Welding range	10 - 280 A	20 - 350 A	20 - 500 A
Load voltage	20.8 - 31.2 V	20.8 - 34 V	20.8 - 40 V
Open circuit voltage	81 V	81 V	81 V
Duty cycle at 100 % (40°C)	250 A at 30 V	350 A at 34 V	500 A at 40 V
Duty cycle at 80 % (40°C)	280 A at 31.2 V	-	-
Duty cycle at 60 % (40°C)	-	-	-
Duty cycle at 40 % (40°C)	-	-	-
Input power at 80 %	9.5 KVA	15 KVA	25 KVA
Input current at 80 %	17 A	23 A	38 A
Input phase	3 Phase	3 Phase	3 Phase
Main voltage, Tolerance	380 V, ± 15 %	380 V, ± 20 %	380 V, ± 20 %
Power factor	0.93	0.93	0.93
Index protection	IP 23	IP 23	IP 23
Insulation class	F	F	F
Cooling	F	F	F
Dimensions (L x W x H)	490 x 220 x 395 mm	600 x 360 x 580 mm	600 x 360 x 580 mm
Weight	20 Kg	31 kg	35 kg

Item Code	Item Name	MoQ
101.02.006.1	S 280 i - MMA DC IGBT Inverter - Lug Package + Electrode Holder & Ground Cable.	1 Set
101.02.006.2	S 280 i - MMA DC IGBT Inverter - Plug Package + Electrode Holder & Ground Cable.	1 Set
101.02.006.3	S 280 i - MMA DC IGBT Inverter - Full Package + Electrode Holder & Ground Cable, TIG Torch WP 17 V & Argon Regulator	1 Set
101.02.004.1	S 350 i - MMA Package + Remote Control RC-02, EH & Ground Cable.	1 Set
101.02.004.3	S 350 i - Standard Package + Remote Control RC-02	1 Set
101.02.005.1	S 500 i - MMA Package + Remote Control RC-02, EH & Ground Cable.	1 Set
101.02.005.2	S 500 i - Standard Package + Remote Control RC-02	1 Set


Remote Control RC-02

Item Code	Item Name	MoQ	101.02.006.1	101.02.004.1	101.02.005.1
-----------	-----------	-----	--------------	--------------	--------------

Standard Accessories

201.11.017	Lug to Ground Clamp 600 A, 50 mm ² at 3 m	1 Set	•		
201.11.018	Lug to Electrode Holder 400 A, 50 mm ² at 3 m	1 Set	•		
208.08.007	Lug to Ground Clamp 600 A, 50 mm ² at 5 m	1 Set		•	•
208.07.008	Lug to Electrode Holder 400 A, 50 mm ² at 5 m	1 Set		•	•

Standard Alternative

208.07.001	Lug to Electrode Holder 600 A, 70 mm ² at 5 m	1 Set			•
208.07.002	Lug to Electrode Holder 600 A, 70 mm ² at 10 m	1 Set			•
208.07.003	Lug to Electrode Holder 600 A, 70 mm ² at 20 m	1 Set			•
208.07.006	Lug to Electrode Holder 400 A, 50 mm ² at 10 m	1 Set		•	
208.07.007	Lug to Electrode Holder 400 A, 50 mm ² at 20 m	1 Set		•	
208.08.004	Lug to Ground Clamp 600 A, 70 mm ² at 5 m	1 Set			•
208.08.005	Lug to Ground Clamp 600 A, 70 mm ² at 10 m	1 Set			•
208.08.006	Lug to Ground Clamp 600 A, 70 mm ² at 15 m	1 Set			•
208.08.008	Lug to Ground Clamp 600 A, 50 mm ² at 10 m	1 Set		•	

Optional Accessories

208.17.006.1	Tig Torch - WP 17 V - Complete Package + Tig Torch - WP 17 V-25-2 at 8 m + Plug - Trak-SK 35 mm + Argon Gas Regulator	1 Set	•	•	•
208.17.007.1	Tig Torch - WP 26 V - Complete Package + Tig Torch - WP 26 V-25-2 at 8 m + Plug - Trak-SK 35 mm + Argon Gas Regulator	1 Set	•	•	•
201.27.003	Gouging Torch G4 - 1000 A - 2.1 m / 7 feet	1 Set		•	•