



MIG Gun - Water Cooled - Ergoplus 500




Advantageous

- Interchangeable with the best-known European brands
- A sturdy torch that combines the qualities of compactness and light weight with great reliability
- Ergonomic handle
- Articulation to ease cable bending
- Attachments : Euro with mobile pins

Specifications

Rating	500 A for CO ₂
	450 A for Mixed Gases M 21
	100 % Duty Cycle
Wire sizes	1.0 - 2.4 mm
Coolant Pressure	2 - 4 bar
Coolant Flow	1.6 l/min

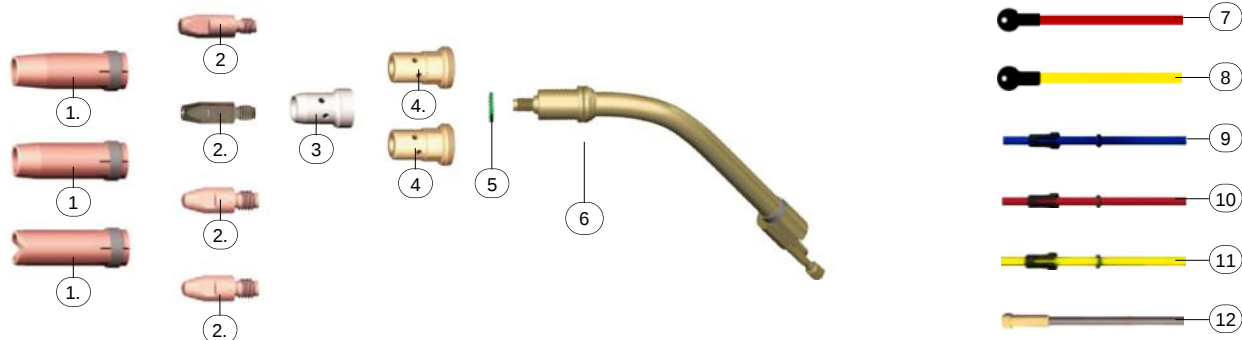

Pos	Item Code	Item Name	MoQ
1	203.05.007	Gas Nozzle - Conical Ø 16.0 mm - Ergoplus / Autoplus 500	2 Pcs / 10 Pcs
1.1	203.05.012	Gas Nozzle - Tapered Ø 15.0 mm - Ergoplus / Autoplus 500	2 Pcs / 10 Pcs
	203.05.011	Gas Nozzle - Tapered Ø 14.0 mm - Ergoplus / Autoplus 500	2 Pcs / 10 Pcs
1.2	203.05.013	Gas Nozzle - Spot Weld Ø 20.0 mm - Ergoplus / Autoplus 500	2 Pcs / 10 Pcs
2	203.08.001	Contact Tip M6, Pure Copper E-Cu Ø 0.8 mm - Ergoplus 24 - 36 - 500	10 Pcs
	203.08.002	Contact Tip M6, Pure Copper E-Cu Ø 0.9 mm - Ergoplus 24 - 36 - 500	10 Pcs
	203.08.003	Contact Tip M6, Pure Copper E-Cu Ø 1.0 mm - Ergoplus 24 - 36 - 500	10 Pcs
	203.08.004	Contact Tip M6, Pure Copper E-Cu Ø 1.2 mm - Ergoplus 24 - 36 - 500	10 Pcs
	203.08.005	Contact Tip M6, Pure Copper E-Cu Ø 1.6 mm - Ergoplus 24 - 36 - 500	10 Pcs
2.1	204.20.002	Contact Tip M6, Silver Plated - Ø 0.9 mm - Ergoplus 24 - 36 - 500	10 Pcs
	204.20.003	Contact Tip M6, Silver Plated - Ø 1.0 mm - Ergoplus 24 - 36 - 500	10 Pcs
	204.20.004	Contact Tip M6, Silver Plated - Ø 1.2 mm - Ergoplus 24 - 36 - 500	10 Pcs
2.2	203.09.001	Contact Tip M8, Pure Copper E-Cu Ø 1.0 mm - Ergoplus 36 - 500	10 Pcs
	203.09.002	Contact Tip M8, Pure Copper E-Cu Ø 1.2 mm - Ergoplus 36 - 500	10 Pcs
	203.09.003	Contact Tip M8, Pure Copper E-Cu Ø 1.4 mm - Ergoplus 36 - 500	10 Pcs
	203.09.004	Contact Tip M8, Pure Copper E-Cu Ø 1.6 mm - Ergoplus 36 - 500	10 Pcs
	203.09.005	Contact Tip M8, Pure Copper E-Cu Ø 2.0 mm - Ergoplus 36 - 500	10 Pcs
	203.09.006	Contact Tip M8, Pure Copper E-Cu Ø 2.4 mm - Ergoplus 36 - 500	10 Pcs
2.3	203.10.001	Contact Tip M8, Copper Chromium Zirconium CuCrZr Ø 1.0 mm - Ergoplus 36 - 500	10 Pcs
	203.10.002	Contact Tip M8, Copper Chromium Zirconium CuCrZr Ø 1.2 mm - Ergoplus 36 - 500	10 Pcs
	203.10.003	Contact Tip M8, Copper Chromium Zirconium CuCrZr Ø 1.4 mm - Ergoplus 36 - 500	10 Pcs
	203.10.004	Contact Tip M8, Copper Chromium Zirconium CuCrZr Ø 1.6 mm - Ergoplus 36 - 500	10 Pcs
3	203.05.004	Gas Diffusor White - Ergoplus / Autoplus 500	5 Pcs / 10 Pcs
4	203.05.005	Tip Holder - M6 Short - Ergoplus / Autoplus 500	2 Pcs / 10 Pcs
4.1	203.05.006	Tip Holder - M8 Short - Ergoplus / Autoplus 500	2 Pcs / 10 Pcs

Pos	Item Code	Item Name	MoQ
5	203.05.010	Insulator - Ergoplus / Autoplus 500	10 Std
6	203.05.008	Torch head - Ergoplus 500 - Ergoplus / Autoplus 500	1 Pc
7	203.13.007	Red Insulated Liner - Steel - Wire Ø 1.0 - 1.2 mm at 3 m	1 Pc
	203.13.008	Red Insulated Liner - Steel - Wire Ø 1.0 - 1.2 mm at 4 m	1 Pc
	203.13.009	Red Insulated Liner - Steel - Wire Ø 1.0 - 1.2 mm at 5 m	1 Pc
8	203.13.010	Insulated Liner Steel Yellow - Wire Ø 1.2 - 1.6 mm at 4 m	1 Pc
9	203.14.003	Blue Teflon Liner - For Aluminum Wire Ø 0.6 - 0.9 mm at 5 m	1 Pc
10	203.14.004	Red Teflon Liner - For Aluminum Wire Ø 1.0 - 1.2 mm at 3 m	1 Pc
	203.14.005	Red Teflon Liner - For Aluminum Wire Ø 1.0 - 1.2 mm at 4 m	1 Pc
	203.14.006	Red Teflon Liner - For Aluminum Wire Ø 1.0 - 1.2 mm at 5 m	1 Pc
11	203.14.008	Yellow Teflon Liner For Aluminum Wire Ø 1.2 - 1.6 mm at 4 m	1 Pc
12	203.14.010	Copper Liner - For Aluminum Wire up to 1.6 mm	1 Pc

Item Code	Item Name	MoQ
203.05.001	Mig Torch - Ergoplus 500 at 3 m long	1 Set
203.05.002	Mig Torch - Ergoplus 500 at 4 m long	1 Set
	• Contact Tip M8, E-Cu Ø 1.2 mm - Ergoplus 36 - 500 • Spanner mig accessory attached	



Recommended Anti Spatter for better Welding result



Better welding performances with Trafimet torch coolant