



Rotabest RB 35 B



Advantageous


- Smooth start, minimize wear of motor, gearbox and electronics
- Self adjusting guides, self locking comes into action automatically for perfect guiding
- Soft touch grips, perfect "grip" on the handles for better work, even with oily gloves
- Holder for allen key, integrated allen key holder, no searching for the key
- Cord length 5 m, extension cord and cable drums mostly not required
- Metal rings, perfect protection for the magnets against penetration by metallic objects (chips, milling dust, etc)
- Performance and weight optimization, weight, dimensioning and coil sizing are ideally matched, this maximize the Tool Force (TM)

Capacity

Core drill Ø	12 - 35 mm
Core drill cutting depth	50 mm
Twist drill Ø	1 - 13 mm DIN 1897 Short

Specifications

Input power	1.100 Watt
Speed under load	450 RPM
Tool adaptor	19 mm Weldon shank
Stroke	120 mm
Cooling	Integrated, automatically
Voltage	230 V - 50/60 Hz
Tool Force (10 mm)	2.100 N out of 9.000 N
Magnet adhesion	9.000 N
Min. material thickness	6 mm
Magnet foot size	70 x 185 mm
Magnet foot type	Rigid
Dimension (L x W x H)	341 x 147 x 360 mm
Weight	10.6 Kg

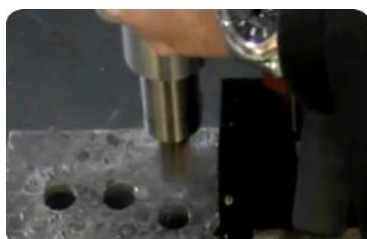

Suitable Cutters	Depth	Diameter
TCT - Alfra & Kobecut	35 mm	14 - 35 mm
TCT - Alfra & Kobecut	50 mm	14 - 35 mm
HSS Cobalt - Alfra & Kobecut	30 mm	12 - 35 mm
HSS Cobalt - Alfra & Kobecut	50 mm	12 - 35 mm

Item Code	Item Name	MoQ
109.01.015	Rotabest RB 35 B	1 Set
	• Transport case, Safety belt, Coolant unit, Allen key 2,5 mm, Allen key 4,0 mm, HSS cutter Co dia. 19 mm depth 50 mm, HSS pilot pin depth 50 mm	

Optional Accessories

209.12.003	Quick Drill Chuck + Weldon Shank for twist drills Ø 1 - 13 mm	1 Pc
225.06.011.1	Quick Chuck - Universal Shank - Ø 1 - 13 mm - 1 Pc	1 Pack
209.12.027	Drill Chuck + Weldon Shank for Twist Drills Ø 1 - 13 mm	1 Pc
209.12.001	HSS Countersink and Deburrer with Weldon Shank Ø 25 mm	1 Pc
209.12.002	HSS Countersink and Deburrer with Weldon Shank Ø 40 mm	1 Pc
209.12.010	Bio 2000	1 Pc
308.02.001	Coolant 2000 at 1 Liter	1 Pc
308.02.002	Coolant 2000 at 5 Liter	1 Pc